
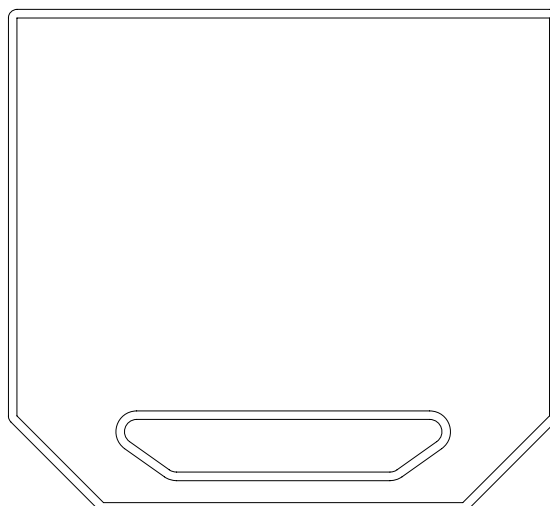
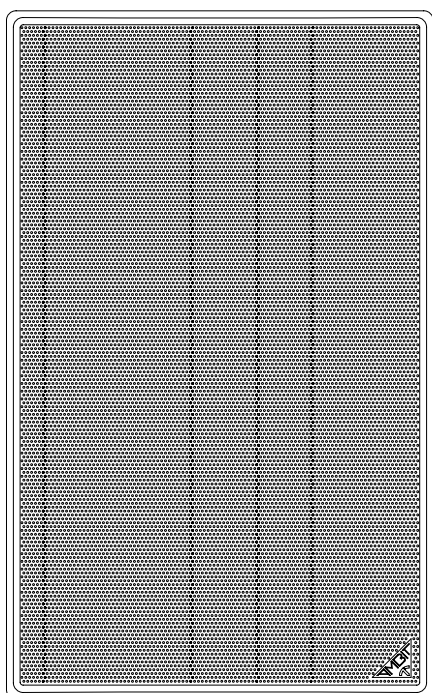
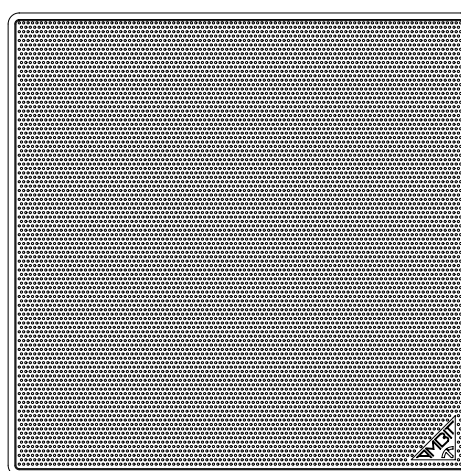


**AMBIT103
AMBIT106
AMBIT108
AMBIT SB110
SERVICE MANUAL**




ECLEREO


AUDIO CREATIVE POWER

SERVICE MANUAL AMBIT


INDEX


- SCHEMATICS
- TECHNICAL CHARACTERISTICS

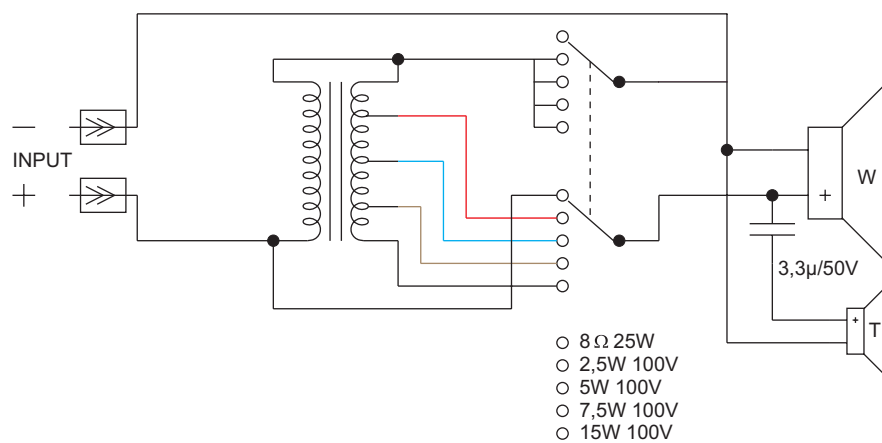

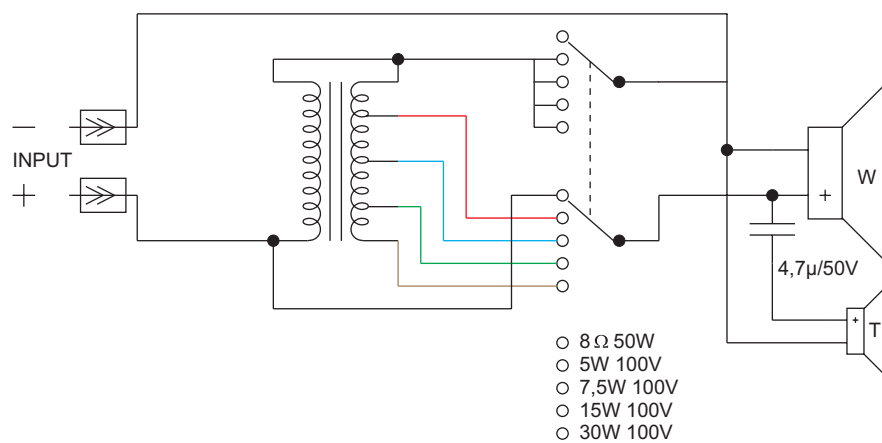



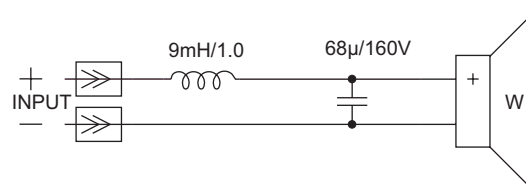

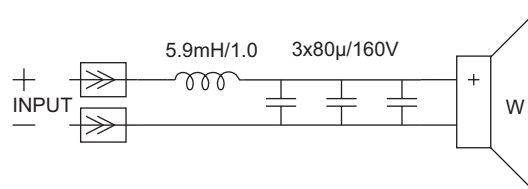

OLD VERSION

ECLER

drawn: *J. Colomines*

date: *060313*

project:

product: *AMBIT SB110*

approved:

title:

SCHEMATIC

number: *10.0737* version: *01.00*

Ways	2
Nominal low impedance	8Ω
Max RMS power	25W
Program power	50W
Nominal high impedance	100V LINE
Power selector	2,5/5/7,5/15W
Efficiency SPL 1W 1m	87dB
Frequency response at –3dB	150Hz ÷ 20kHz
Dimensions WxHxD (without accessories)	120x120x117
Weight	1,275kg

Ways	2
Nominal low impedance	8Ω
Max RMS power	50W
Program power	100W
Nominal high impedance	100V LINE
Power selector	5/7,5/15/30W
Efficiency SPL 1W 1m	93dB
Frequency response at –3dB	110Hz ÷ 20kHz
Dimensions WxHxD (without accessories)	210x210x160
Weight	2.75kg

Ways	2
Nominal low impedance	8Ω
Max RMS power	100W
Program power	200W
Nominal high impedance	100V LINE
Power selector	7,5/15/30/60W
Efficiency SPL 1W 1m	93dB
Frequency response at –3dB @ 8Ω	90Hz ÷ 22kHz
Dimensions WxHxD (without accessories)	228x356x240
Weight	6,2kg

Ways	1
Nominal low impedance	8Ω
Max RMS power	200W
Program power	400W
Efficiency SPL 1W 1m	92
Frequency response at –3dB	78Hz ÷ 200Hz
Dimensions WxHxD (without accessories)	450x420x320
Weight	15,7kg