

Technical Manual

JBL JRX115i

SPECIFICATIONS

JBL
PROFESSIONAL

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: 250W, Peak Power Capacity 1000W
- Frequency Range: 38 Hz – 16 kHz (–10dB)
- Sensitivity: 98 dB, 1Watt @ 1 Meter
- Crossover Frequency: 1.6 kHz

SYSTEM COMPONENTS:

- Cabinet: Enclosure JRX115i (Not for Sale)
- Grille: JRX115i 352946-001
- Low Frequency Transducer: 380mm (15 in.) M115-8A Cone Transducer (124-67001-01X)
- DC Resistance: 5.3 ohms
- High Frequency Transducer: 25.4mm (1 in.) Exit Compression Driver 2412H-1 (339013-001X)

SYSTEM COMPONENTS:(Cont'd)

- DC Resistance: 4.3 ohms
- Crossover Network: 352925-004

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 7.0V Input, 20 Hz to 20 kHz
- B. L.F. Aural Sweep Test: 7.0V Input, 20 Hz to 1.2 kHz
- C. H.F. Aural Sweep Test: 2.83V Input, 500 Hz to 20 kHz


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 698.5mm x 459.9mm x 431.8mm D (27.5 x 18.11 x 17.0 in.D)
- Shipping Weight: 67.0 lbs. (30.4 kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.


PACKAGE

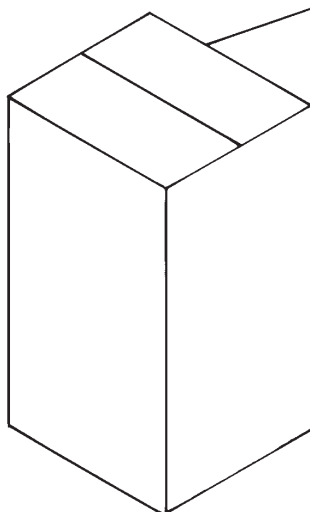


Warranty 59660
User Guide, 352934-001

Filler (2)
339021-001
Microfoam (5)
49790P
Carton
352933-001
Pad (2)
351892-001
Rigging
Hardware Kit
229-00009-01

WIRING DIAGRAM

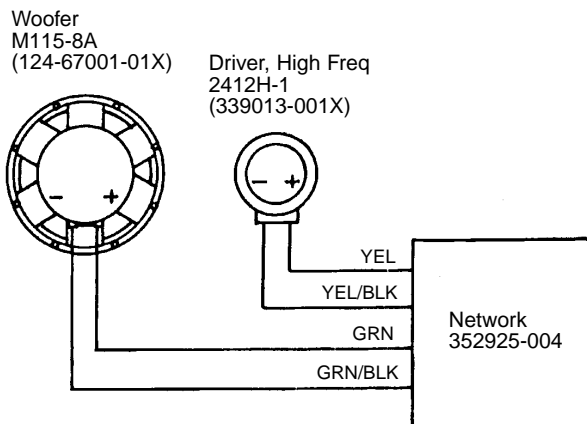

SCHEMATIC DIAGRAM JRX115i (352925-004)

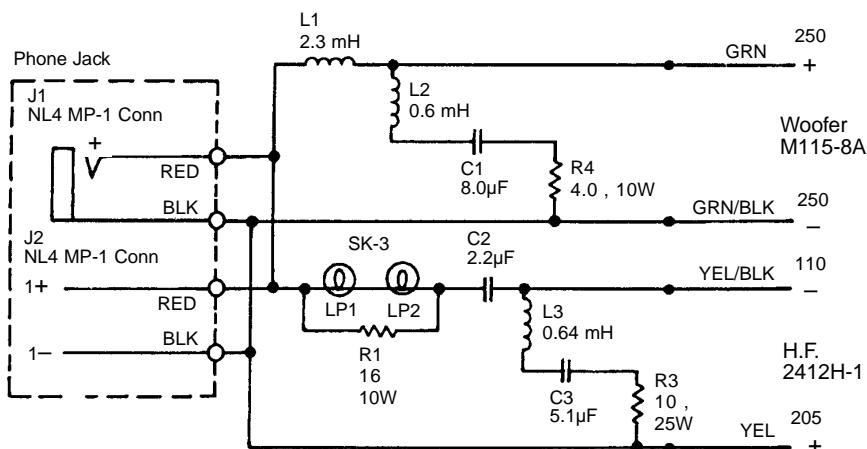
JBL JRX115i REV C

COMPONENT EXPLODED VIEW

