





BM-SERIES

BM-D450

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

| | | |
|--------------------------|--|----------------------|
| Throat Diameter | : 25 | mm (1 in) |
| Mounting Type | : Bolt-On | |
| Nominal Impedance | : 8 | ohm |
| D.C Resistance | : 6.4 | ohm |
| Power Capacity | : 80 | W Continuous Program |
| Sensitivity 1W/1M | : 108 | dB With PH-3220 |
| Usable Frequency Range | : 1.5K~18K | Hz |
| Recommended Crossover | : 2.2 | Hz 12dB/oct |
| Voice Coil Diameter | : 44.4 | mm (1.75 in) |
| Magnetic Assembly Weight | : 2.5 | Kg (5.5 lb) |
| Flux Density | : 1.7 | T |
| Magnet | : Strontium Ferrite | |
| Diaphragm Material | : Titanium | |
| Voice Coil Material | : Edge Wound Copper Clad Aluminium Ribbon | |
| Voice Coil Former | : Resin Bonded Kapton | |

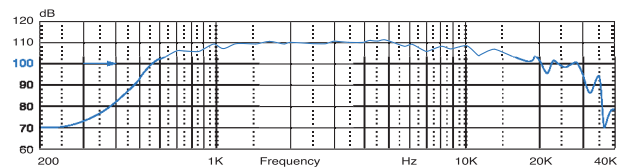

BM-D450S

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

| | | |
|--------------------------|--|----------------------|
| Throat Diameter | : 25 | mm (1 in) |
| Mounting Type | : Screw-On | |
| Nominal Impedance | : 8 | ohm |
| D.C Resistance | : 6.4 | ohm |
| Power Capacity | : 80 | W Continuous Program |
| Sensitivity 1W/1M | : 108 | dB With PH-3220 |
| Usable Frequency Range | : 1.5K~18K | Hz |
| Recommended Crossover | : 2.2 | Hz 12dB/oct |
| Voice Coil Diameter | : 44.4 | mm (1.75 in) |
| Magnetic Assembly Weight | : 2.7 | Kg (5.94 lb) |
| Flux Density | : 1.7 | T |
| Magnet | : Strontium Ferrite | |
| Diaphragm Material | : Titanium | |
| Voice Coil Material | : Edge Wound Copper Clad Aluminium Ribbon | |
| Voice Coil Former | : Resin Bonded Kapton | |

