

Technical Manual

JBL JRX118S

SPECIFICATIONS

JBL

PROFESSIONAL

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Capacity: 700 W, Continuous Program
- Frequency Range: 38Hz – 300 Hz (–10dB)
- Sensitivity: 96dB, SPL (1 W at 1 M)
- Crossover Frequencies: 30Hz, HPF 24dB/80 –100Hz, LPF, 24dB

SYSTEM COMPONENTS:

- Cabinet: (Not For Sale)
- Grille: 352838-001
- Low Frequency Transducer: 460mm (18 in.) Cone Transducer 2043G (352938-001X)
- DC Resistance: 2.6 ohm
- Crossover Network: 352943-003

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 10.0V Input, 20 Hz to 1.2 kHz
- B. L.F. Aural Sweep Test: 10.0V Input, 20 Hz to 1.2 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 597mm x 516mm x 559mm D (23.5 x 20.3 x 22.0 in. D)
- Net Weight: 71 lbs. (32.2 kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.


PACKAGE

Warranty 59660
Specification Sheet
352947-001

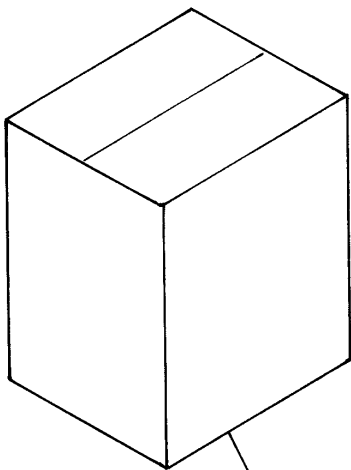


Filler (2)
352986-001
Micro Foam (16)
49790P
Carton
352940-001

WIRING DIAGRAM

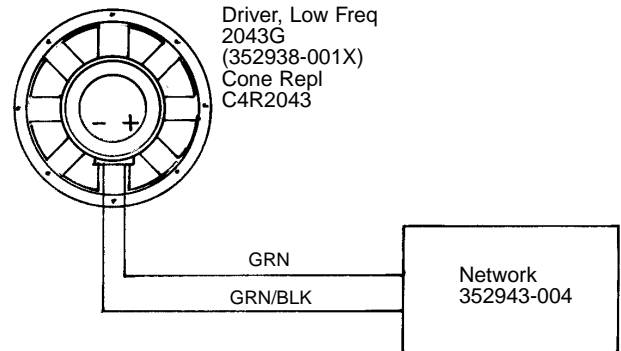

SCHEMATIC (352943-004)

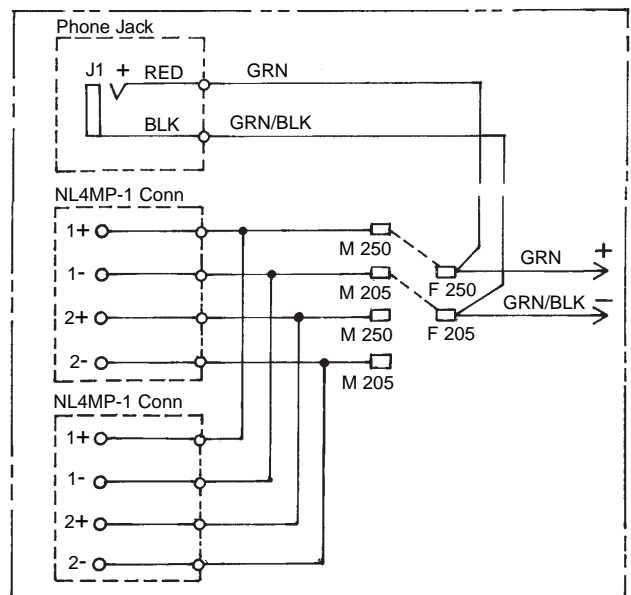

JBL JRX118S REV H

JBL JRX118S

COMPONENT EXPLODED VIEW

